

The Importance of the Target Characteristics

What Target Characteristics Drive SAR Scattering?



SARs respond to two fundamental characteristics of a target:

(1) structure or roughness (2) water content

Roughness: characterized by two parameters, the root mean square variance (RMS) and the surface correlation length (l)


RMS: the statistical variation of the random component of the surface height relative to a reference surface (in mm or cm) (root mean square rms height)

For surfaces without periodic structure the reference surface is simply the mean surface height. For surfaces with a periodic structure the unperturbed reference surface is the polynomial function fitted to the periodic structure.

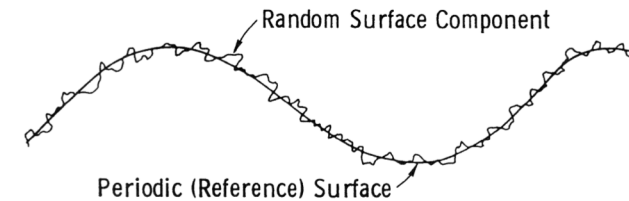

Surface Roughness

Correlation length (l): an autocorrelation function that measures the statistical independence of surface heights at two points, spatially separated by a distance x' . The correlation length is equal to the displacement distance x' for which $\rho(x')$ is equal to $1/e$. If two points are separated by a distance greater than l , their surface heights are considered statistically independent.

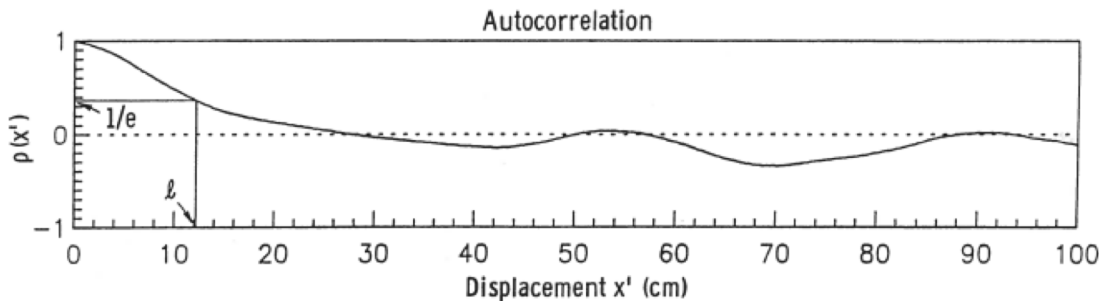

For a perfectly smooth surface, the height of every point is correlated with the height of every other point and hence l is very large. Inversely, randomly rough surfaces have short correlation lengths.

smooth soil:
small RMS
large l



rough soil:
large RMS
small l



Surface Roughness



How does the roughness (rms and l) of these land covers vary?

What would SAR think?




How is Roughness Measured in the Field?





Gridded Board



SRM-200

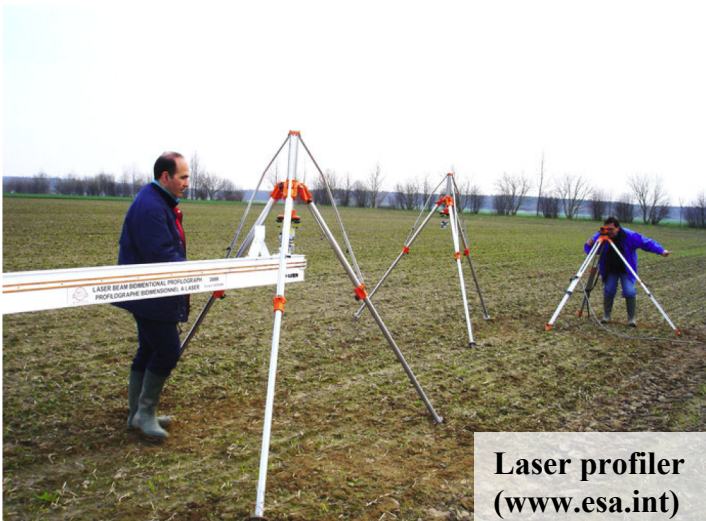

**Laser profiler
(www.esa.int)**

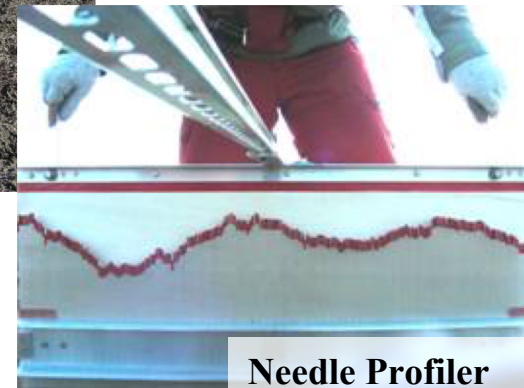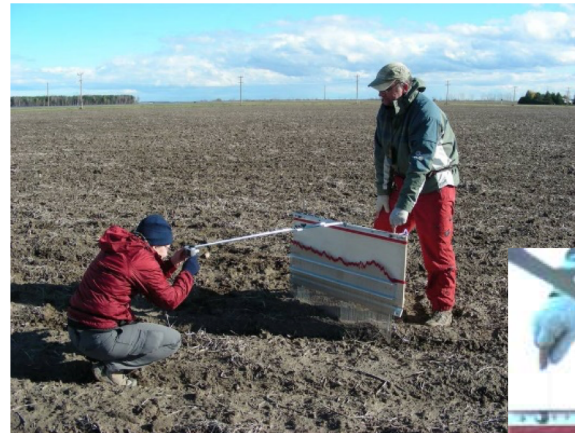

Needle Profiler

How Does Roughness Affect Backscatter?

- backscatter will increase as roughness increases
- bottom line: rougher surfaces appear brighter in SAR images






expected
relative SAR
response

The impact of roughness on backscatter depends on the frequency and incident angle of the SAR. **Roughness is a relative concept.**

According to the Rayleigh Criterion, a soil is **smooth** if

$$h < \frac{\lambda}{8 \cos \theta}$$

where h is surface height variation in cm, λ is the wavelength in cm and θ is the incident angle in degrees

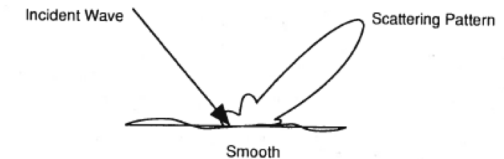

It's All Relative

Roughness less than “h” would be viewed as **smooth** by the SAR

Incident Angle of 30°


TerraSAR-X (3.1 cm)	$h < 0.45$ cm
RADARSAT-2 (5.6 cm)	$h < 0.81$ cm
PALSAR (23.6 cm)	$h < 3.42$ cm

Incident Angle of 50°

TerraSAR-X (3.1 cm)	$h < 0.60$ cm
RADARSAT-2 (5.6 cm)	$h < 1.09$ cm
PALSAR (23.6 cm)	$h < 4.59$ cm


TABLE 1
AVERAGE RANDOM ROUGHNESS (s) VALUES
BASED ON SINGLE TILLAGE OPERATIONS [12].

Tillage Operation	s (cm)
Large offset disk	5.0
Moldboard plow	3.2
Lister	2.5
Chisel plow	2.3
Disk	1.8
Field cultivator	1.5
Row cultivator	1.5
Rotary tillage	1.5
Harrow	1.5
Anhydrous applicator	1.3
Rod weeder	1.0
Planter	1.0
No till	0.7
Smooth	0.6

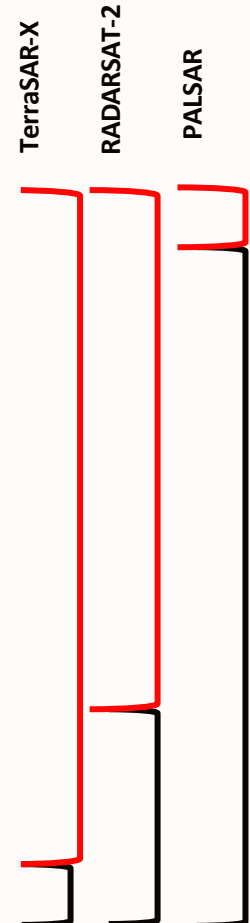

- Viewed by SAR as smooth at 50°
- Viewed by SAR as rough at 50°

A Special Case – Bragg Scattering

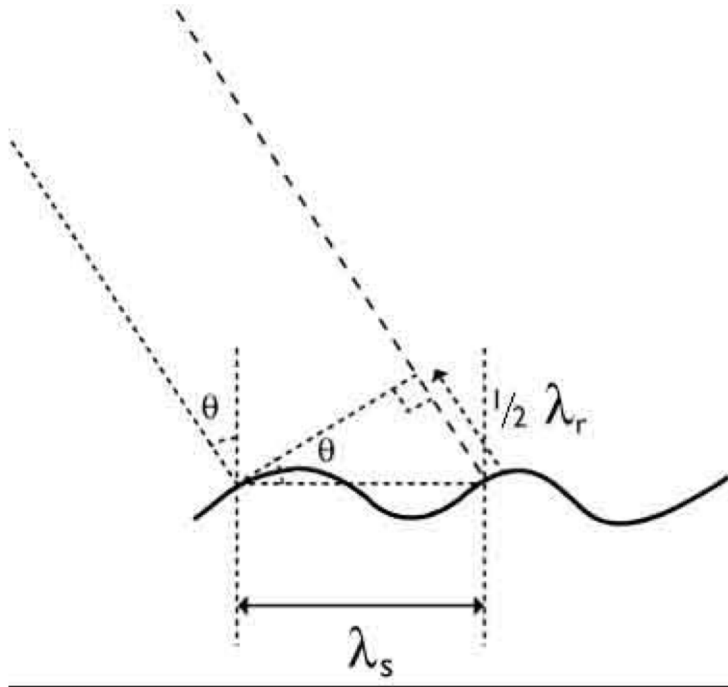


$$\lambda_s = \frac{\lambda_r}{2 \sin \theta}$$

λ_r = radar wavelength (cm)

λ_s = length of periodic structure (cm)

θ = incidence angle


- bragg scattering: the effects of the reflection of microwaves on periodic structures whose distances are in the range of the SAR wavelength
- causes high backscatter responses

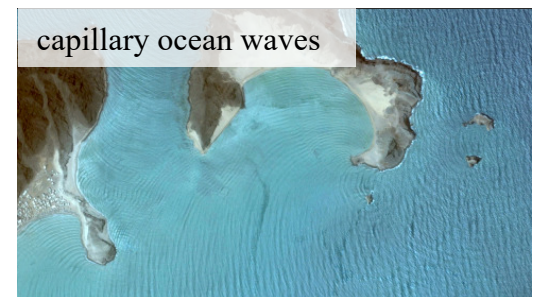

Example – Identify When Tillage Occurs


Very important: No other target (moisture) or SAR (angle, polarization, frequency) can change from one image to the next

What are we detecting? A change in backscatter due to an increase in roughness

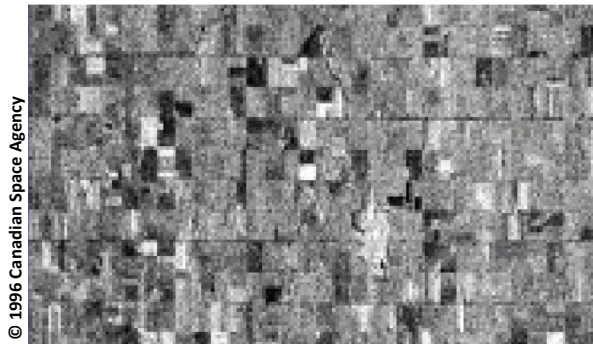


© 1996 Canadian Space Agency


October 10, 1996

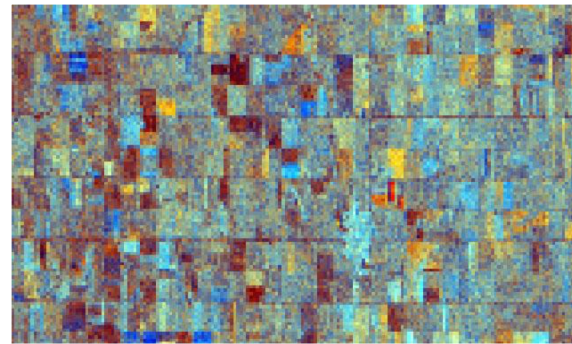

R=Difference G=October 17 B=October 10

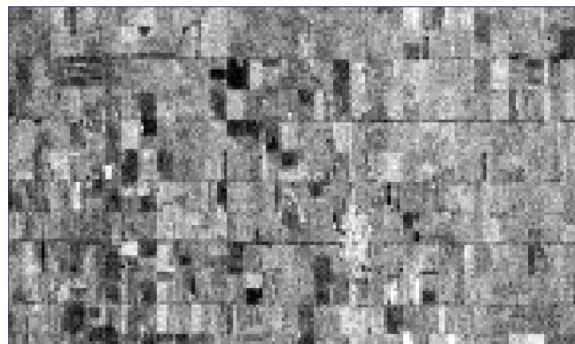

October 17, 1996

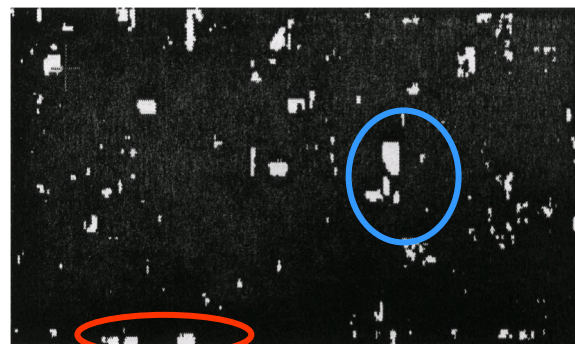

Change Detection Image

*Tilled
Why?
Backscatter
increased*

*Harvested
Why?
Backscatter
decreased*

One Complication


- “look direction” of SAR **relative to the orientation of the target** impacts the strength of radar return. Creates a so-called “bow-tie” effect in agriculture (planting, tilling or harvesting).
- strongest backscatter results when the SAR look direction is perpendicular to the direction of the structure
- for natural targets this phenomenon is not present in cross-polarizations (**HV and VH**) as these polarizations are responding to volume scattering rather than surface scattering

Orientation of buildings in urban area




North-south running streets show strong radar return, as the buildings are oriented perpendicular to the imaging radar beam

www.asf.alaska.edu/asf-tutorials/image-interpretation/



RADAR LOOK DIRECTION


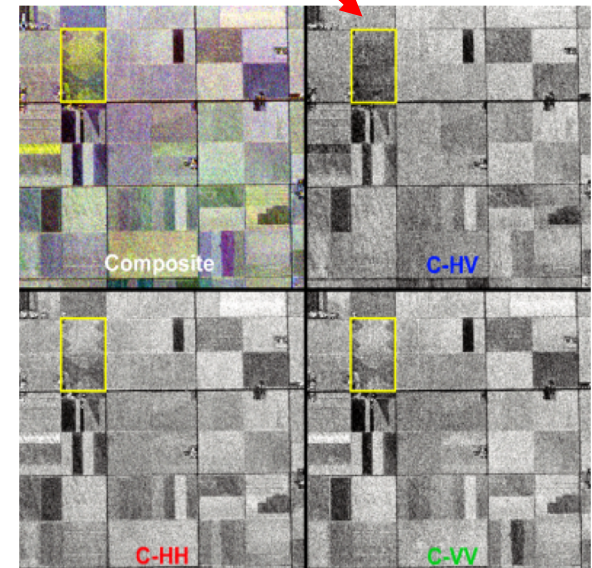


Impact of farming operations

What About Water In the Target?

SAR is known to be sensitive to moisture, but **why**?

- water (H_2O) is a dipole: the oxygen side of the molecule carries a net negative charge, while the side with the two hydrogen atoms has a net positive electrical charge
- as such, when an electric field (such as a microwave) is applied, the water molecule will rotate and align itself to this applied field

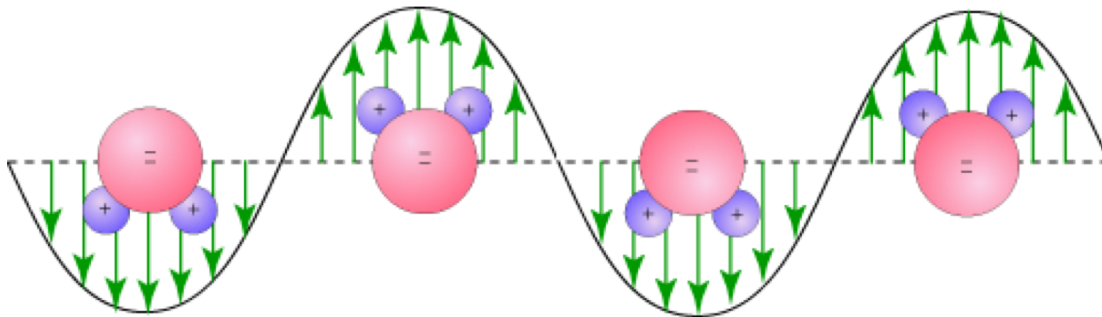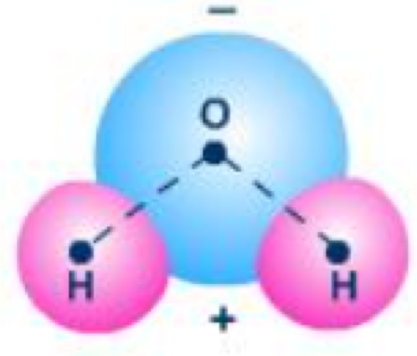


- dielectric constant: a measure of the ease with which dipolar molecules rotate in response to an applied field
- dielectric constant (ϵ): a complex value which characterizes both the permittivity (ϵ') (real) and conductivity (ϵ'') (imaginary) of a material

$$\epsilon = \epsilon' - j\epsilon''$$


- real dielectric ranges from ~ 3 (very dry) to 80 (water)

Microwaves and Water Molecules

- a microwave will continue to propagate until a dielectric discontinuity is encountered, as happens when water is present in the target
- when an electric field is applied, free water molecules (**not tightly bound**) easily rotate to align with the field (positive to negative)
- frictional resistance is low and little energy stored in the rotation is lost when the wave passes and the molecule relaxes. Most of the stored energy is released.
- if many water molecules are present, a significant amount of energy is stored and released. When little water is present, little energy is stored.
- when this stored energy is released, and depending on structure of the target, this energy will be scattered back towards the radar antenna

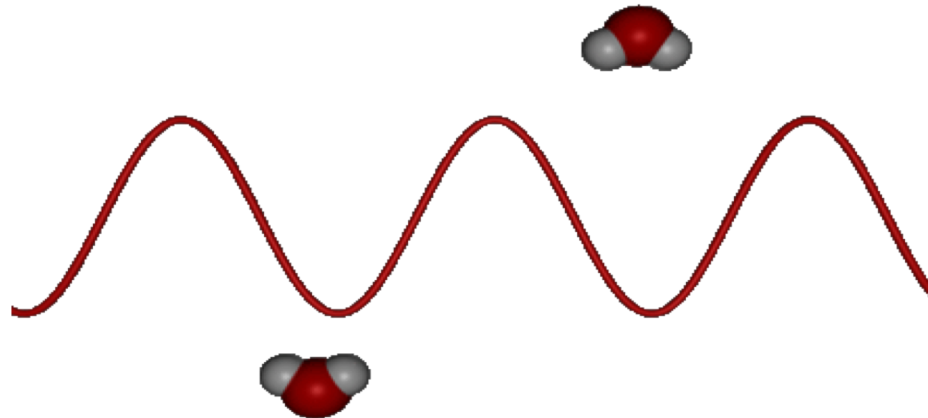

Measuring Volumetric Water Content in the Field

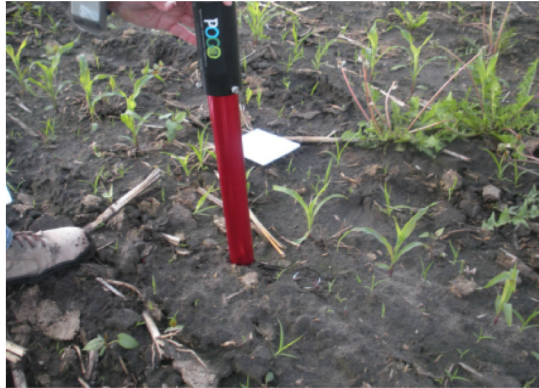

- can be measured using gravimetric samples
- weight of wet soil is measured and following oven drying, dry weight of the soil is measured
- the gravimetric weight is calculated as the wet minus dry weight
- volumetric water content is determined using the gravimetric weight and known volume of measurement cylinder or the soil bulk density




- for SAR soil moisture applications, typically impedance probes are used
- these probes generate an electromagnetic signal that is propagated through metal tines into the soil.
- the part of the signal that is reflected back to the unit is measured in volts and used to calculate the real dielectric. The dielectric is related to volumetric soil moisture using empirical relationships or using physically based dielectric mixing models



What Does This Mean For SAR?

- a strong positive relationship between real dielectric constant and soil moisture
- a strong positive relationship between real dielectric constant and SAR backscatter
- in a nutshell: more water in the target = higher backscatter = brighter returns
- applies to ANY target (soil, vegetation etc.)

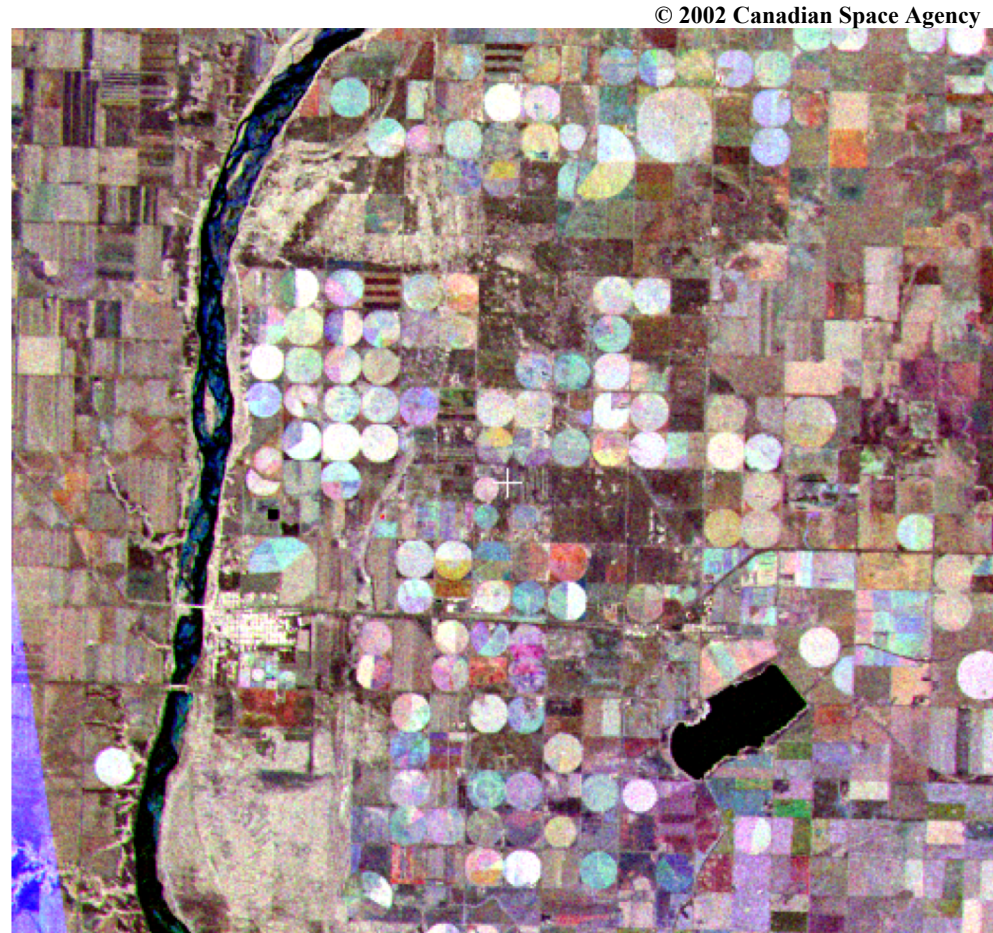


Multi-Date RADARSAT-1 Composite
Outlook, Saskatchewan (Canada)

The Penetration Depth

- recall that penetration into the target is dependent upon the SAR frequency or wavelength
- depth of penetration **ALSO** depends upon water in the target
- penetration depth (δ_p) into the target is defined by the dielectric (ϵ) and wavelength (λ), and incident angle
- penetration increases with wavelength and is greater when target (soil or crop) is drier

Simulation for SAR penetration depth in sand as a function of moisture content, at L-band wavelength of 23.5 cm.

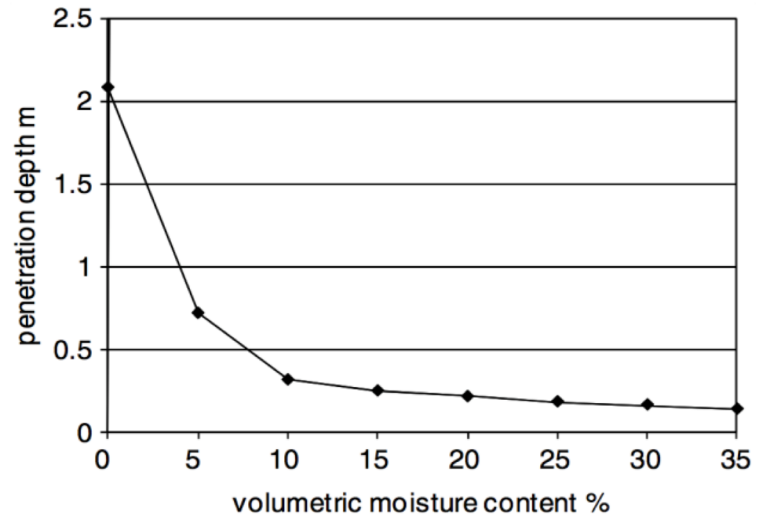

Vegetation Effects

The scales are very different

Optical sensors:

- amount of energy absorbed, reflected and transmitted by vegetation is driven by plant pigmentation as well as internal leaf structure and moisture
- chemical and physical properties (at the atom level) are vegetation type specific and are indicative of the growth stage and condition of the vegetation


SARs:

- scattering of longer-wavelength microwaves is driven by (a) larger scale structures (size, shape and orientation of leaves, stems, branches and fruit) and (b) the volume of water in the vegetation canopy (at the molecule level)

So why is SAR sensitive to vegetation type and development?


Vegetation structure changes significantly from one vegetation type to the next, and as plants move through their growth stages.

Vegetation Effects



Scattering from Vegetation – It's Complicated



- many different types and combinations of scattering can occur in a canopy
- following a wave into a canopy, it may:
 - scatter directly **off a leaf**
 - scatter **from leaf of one stem/branch to another leaf (several times)**
 - make its way to the soil and scatter **from the soil**
 - make its **way to soil, then scatter off a stalk/trunk/branch**
 - the wave may hit parts of the canopy on its way out
- these scattering events determine how much of the energy will return back to the SAR sensor, and how the phase between, for example, H and V components will change (offsets in phase and how random the phase becomes)
- these scattering characteristics tell us what type of vegetation is present and what the condition is of that vegetation

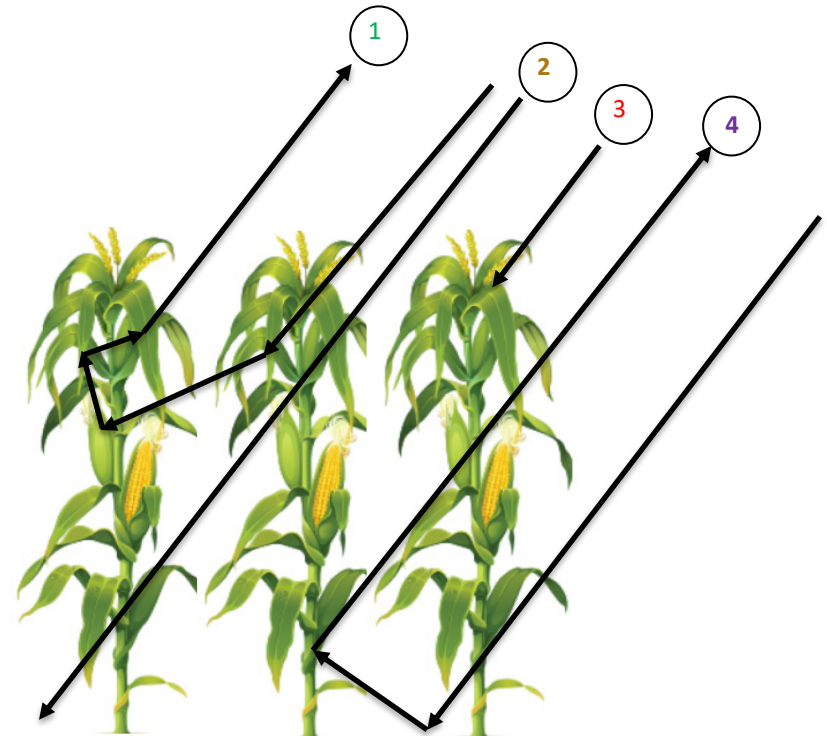

1. **Multiple volume scattering from within canopy**
2. **Direct scattering from soil**
3. **Direct scattering from canopy**
4. **Double bounce scattering between soil and canopy**

Don't Forget the SAR Basics

- These interactions with the canopy are **very** dependent upon the characteristics of the SAR
 - frequency; polarization; incidence angle
 - look direction (relative to the target)
- Frequency:
 - canopies can attenuate or scatter microwaves
 - the dominance of one or the other depends on the wavelength relative to the size of the canopy components
 - scattering occurs when canopy component (such as a leaf) is close to or larger than wavelength
 - some components will attenuate microwaves, especially at shorter wavelengths
 - frequency also affects penetration depth
 - longer wavelengths penetrate deeper into the canopy and involve more interaction with the soil/understory



What is the Best Frequency – It Depends



Soil moisture

- longer wavelengths (like L-band) are better as they penetrate deeper into the canopy and interact with the soil
- longer wavelengths also “see” most soil surfaces as smooth (minimizes the effects of roughness)

Vegetation classification and biophysical modelling


- depends on the canopy (size of leaves, stems, branches, trunks; height of canopy)
- need enough penetration into canopy but not too deep so that some scattering also comes from soil/understory
- *the best:* multi-frequency so that you have data collected at the optimal wavelength for each canopy

Polarization and Incident Angle



Polarization

- affects how microwaves interact with target
- V-polarized waves couple with vertical structured vegetation and more of the energy is attenuated
- H-polarized waves have greater penetration through the canopy to the underlying soil
- cross-polarizations (HV/VH) are sensitive to the target volume and are not affected by row effects
- **HV or VH** is typically the single best polarization for monitoring vegetation
- next best polarization is usually VV

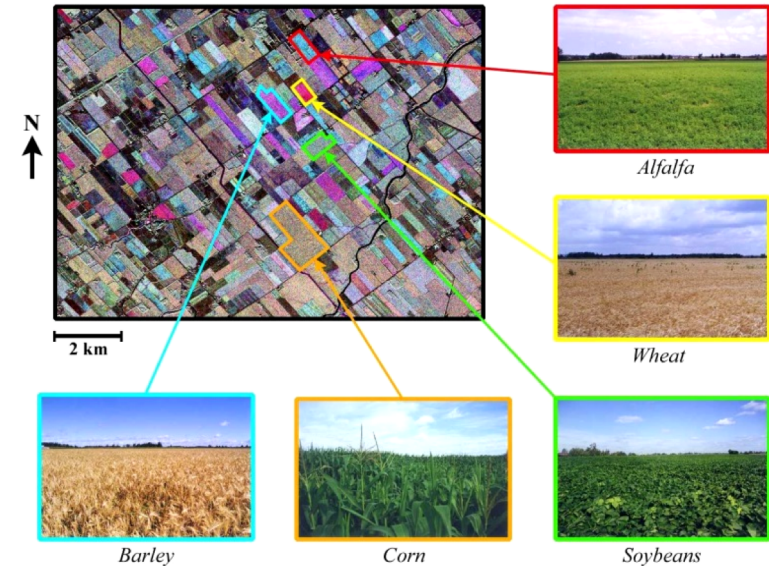

Airborne CV-580 C-Band SAR
South of Ottawa, 1998 July 9
R = HH G = HV B = VV

Incident angle

- not as critical
- temporal change detection, do not mix angles
- for biophysical estimation, ok to mix angles as long as the model accounts for incident angle

A Complication – the Environment

Always, Always, Always check the environmental conditions at the time of image acquisition, before using SAR data

Rule 1: Never use SAR if it was raining at the time of the acquisition

Why? Although SAR is considered “all weather” this does not include imaging during rain events as large water droplets in the atmosphere will cause SAR scattering.

In some regions of world, risks are diurnally dependent.



Rule 2: Consider if dew might be present during early morning acquisitions

Why? Presence of water on leaves will increase backscatter (big problem for biophysical modelling).

If water on canopy is significant (just after rain), contrast between targets can be reduced.

Dew is most prominent in temperate regions in early morning hours.



A Complication – the Environment (2)

Rule 3: Never use SAR if the target is frozen

Why? The dielectric constant drops close to zero when water changes to a frozen state.

The water molecule is unable to rotate and the SAR “thinks” that because no energy is being stored, there is no water present!

Thus even if there is water in the target, the SAR will view the target as dry.

Freezing often occurs overnight.

The upside: SAR can detect freeze/thaw events.

What to do?

1. Select orbits (ascending – evening; descending – morning) carefully
2. Always check in with meteorological stations



Acknowledgment



Agriculture and
Agri-Food Canada

Agriculture et
Agroalimentaire Canada



Natural Resources
Canada

Ressources naturelles
Canada



Environment and
Climate Change Canada

Environnement et
Changement climatique Canada



Jackson, T.J., McNairn, H., Weltz, M.A., Brisco, B. and Brown, R.J. (1997). First order surface roughness correction of active microwave observations for estimating soil moisture. *IEEE Transactions on Geoscience and Remote Sensing* 35:1065-1069.

Richards, J. A. (2009). *Remote sensing with imaging radar*. Heidelberg, Germany : Springer